

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 1 285 683 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:

26.02.2003 Bulletin 2003/09

(51) Int Cl.7: **B01D 29/96**

(21) Application number: **02015148.6**

(22) Date of filing: **06.07.2002**

(84) Designated Contracting States:

**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
IE IT LI LU MC NL PT SE SK TR**

Designated Extension States:

AL LT LV MK RO SI

• **Ng, Kwok-lam**

Madison, Wisconsin 53726 (US)

• **Bannister, Robert A.**

Stoughton, Wisconsin 53589 (US)

• **You, Tao**

Madison, Wisconsin 53719 (US)

(30) Priority: **22.08.2001 US 934508**

(71) Applicant: **Fleetguard, Inc.**

Nashville, Tennessee 37214 (US)

(74) Representative: **Gesthuysen, von Rohr & Eggert
Patentanwälte**

Postfach 10 13 54

45013 Essen (DE)

(72) Inventors:

• **Wagner, Brian K.**

Stoughton, Wisconsin 53589 (US)

(54) Replaceable filter element and snap-on filter lid assembly

(57) A filter (20) has a removable cover (30) releasably engaging and gripping an end cap (40) of a filter element (34) including upon removal from the filter housing (22). The cover has a plurality of axially extending cantilever legs (102, 104) gripping a mushroom-shaped boss (118) on the end cap.

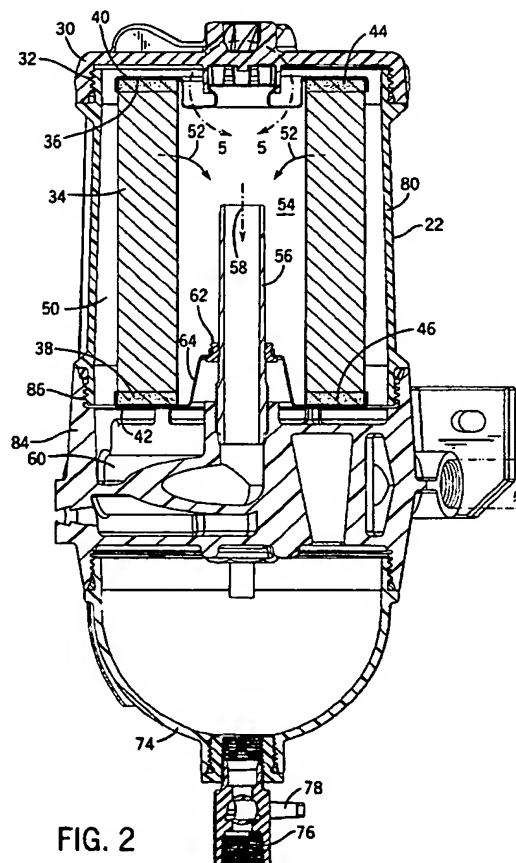


FIG. 2

Description

BACKGROUND AND SUMMARY OF THE INVENTION

[0001] The invention relates to filters, and more particularly to a filter element cover grip combination facilitating easy removal.

[0002] Filters are typically serviced by removing a cover and then removing the replaceable filter element from the filter housing, but usually with extensive human contact with the filter element, which is undesirable because of the mess, etc. It is known in the prior art to provide a filter assembly having a cover snapped onto the outside diameter of the filter element, however such snap-fit mechanism damages the filter media of the element. It is also known to provide a filter support tube and housing cover with snap detent connection therebetween, for example U.S. Patent 5,695,633.

[0003] The present invention provides a simple and effective cover and filter element grip combination. The filter element is snapped into the cover and can be assembled and disassembled to the filter housing. The cover when inverted acts as a drip pan for the element. Minimal human contact is required.

BRIEF DESCRIPTION OF THE DRAWINGS

[0004]

- Fig. 1 shows a filter known in the prior art, except for the internal filter element cover grip combination,
- Fig. 2 is a sectional view taken along line 2-2 of Fig. 1 and illustrating the filter element cover grip combination in accordance with the present invention,
- Fig. 3 is an exploded perspective view of a portion of Fig. 2,
- Fig. 4 is an enlarged view of a portion of Fig. 2,
- Fig. 5 is a further enlarged view of a portion of Fig. 2 along line 5-5,
- Fig. 6 is an exploded perspective view illustrating assembly,
- Fig. 7 is an inside end view of the cover of Fig. 6,
- Fig. 8 is a view like a portion of Fig. 5 and illustrating assembly,
- Fig. 9 is a view like Fig. 4 and illustrating assembly,
- Fig. 10 is a view like Fig. 9 and further illustrating assembly,

Fig. 11 is a view like Fig. 4 inverted.

DETAILED DESCRIPTION

- [0005] Fig. 1 shows a filter 20, which in disclosed form is a diesel fuel filter, though the invention is not limited thereto. The filter includes a housing 22 extending axially along an axis 24 between distally opposite first and second ends 26 and 28. A cover 30 is removably mounted to the housing and closes first end 26. Cover 30 is preferably threadingly mounted at threads 32, Fig. 2, to the housing and is rotatable about axis 24. As is known, an annular filter element 34, Fig. 2, extends axially in the housing between distally opposite first and second ends 36 and 38 respectively at first and second ends 26 and 28 of filter housing 22. First and second end caps 40 and 42 are permanently and sealingly mounted to respective ends 36 and 38 of the filter element, for example by being potted thereto by potting material such as 44 and 46, as is known. End cap 40 is releasably engaged and gripped by cover 30, including upon removal of cover 30 from housing 22, to be described. The remainder of filter 20 is conventional, and will be only briefly described. Filter 20 has a diesel fuel inlet 48, Fig. 1, receiving liquid to be filtered, which liquid flows into annular space 50, Fig. 2, in the housing, then radially inwardly through filter element 34 as shown at arrows 52, into hollow interior 54 of the filter element, then axially through outlet tube 56 as shown at arrow 58, then through fuel outlet 60, Fig. 1. Outlet tube 56 is sealed at grommet 62 to inner portion 64 of end cap 42. A heater cable 66 and electrical plug 68 may be provided for heating the fuel, particularly diesel fuel. Further heating of the fuel, particularly at engine start-up, may be provided by a water jacket around the housing having an inlet 70 and an outlet 72. A collection bowl or reservoir 74 collects coalesced liquid and contaminant from the fuel, for drainage at drain plug 76 as controlled by drain valve 78. Further as is known, filter housing 22 is provided with a transparent or clear housing sidewall at 80, Figs. 2, 3, for visual inspection of the fuel level in annular space 50, as an indication of pressure drop across the filter element, i.e. the higher the fuel level the greater the pressure drop, and hence an indicator of an oncoming need for a filter element change. Annular sidewall 80 of filter housing 22 is thread mounted at threads 32 to cover 30 and sealed thereto at O-ring 82, and is thread mounted to base 84 at threads 86 and sealed thereto at O-ring 88. The construction thus far described is known in the prior art.
- [0006] Cover 30 has a plurality of axially extending cantilever legs 102, 104, etc., Figs. 3-9, gripping end cap 40 in detent relation, with the legs being deflectable radially outwardly to release end cap 40. The legs have fixed root ends such as 106, 108, Fig. 5, at cover 30, and extend axially into the housing to inner free ends 110, 112 having radially inwardly pointing feet 114, 116. End cap 40 has a mushroom-shaped boss 118, Figs. 6,

10, with a head 120 of a first outer diameter and facing cover 30, and a trunk 122 of an outer diameter smaller than the outer diameter of head 120 and extending axially from head 120 on the opposite side thereof from cover 30. Cover 30 and mushroom-shaped boss 118 are axially engageable, Figs. 6, 8, 9, 10, with feet 114, 116 sliding axially along head 120 and with legs 102, 104 deflecting radially outwardly, as shown at arrow 124, Fig. 8, and then with feet 114, 116 sliding axially past head 120 as boss 118 slides between legs 102, 104 and axially toward cover 30 as shown at arrow 126, and then with legs 102, 104 deflecting back radially inwardly with feet 114, 116 behind head 120, Fig. 5, on the axially opposite side thereof from cover 30. Legs 102, 104, etc. loosely radially grip boss 118 and slide circumferentially along head 120 during rotation of cover 30 during both installation and removal, and grip boss 118 to axially pull filter element 34 out of the housing during removal.

[0007] Legs 102, 104, etc. extend axially into housing 22 to an inner axial reach at free ends 110, 112 beyond the noted first end 36 of filter element 34, and grip end cap 40 at mushroom-shaped boss 118. Filter element 34 has the noted hollow interior 54 which is spanned and closed by end cap 40 at first end 36. End cap 40 has a central concave section 128, Figs. 6, 10, extending into hollow interior 54. Legs 102, 104, etc. extend into concave section 128 and engage the end cap at mushroom-shaped boss 118 in detent relation as above described. Filter element 34 at end cap 40 may be mounted to cover 30 before or after insertion into housing 22. Upon removal, filter element 34 at end cap 40 is axially pulled from the housing by legs 102, 104 at feet 114, 116. After removal, the end cap and filter element may be inverted, Fig. 11, such that the end cap provides a drip pan for the diesel fuel oil.

[0008] It is recognized that various equivalents, alternative and modifications are possible within the scope of the appended claims.

Claims

1. A filter comprising a housing (22) extending axially along an axis (24) between distally opposite first and second ends (26, 28), a cover (30) removably mounted to said housing (22) and closing said first end (26), an annular filter element (34) extending axially in said housing (22) between distally opposite first and second ends (36, 38) respectively at said first and second ends (26, 28) of said housing (22), an end cap (40) at said first end (36) of said filter element (34) and releasably engaged and gripped by said cover (30) including upon removal of said cover (30) from said housing (22),
2. Filter according to claim 1 wherein said cover (30) has a plurality of axially extending cantilever legs (102, 104) gripping said end cap (40), preferably, wherein said cantilever legs (102, 104) are gripping said end cap in detent relation, said legs (102, 104) being deflectable radially outwardly to release said end cap (40), further preferably, wherein said legs (102, 104) have a fixed root end (106, 108) at said cover (30) and extend axially into said housing (22) to inner free ends (110, 112) having radially inwardly pointing feet (114, 116), and said end cap (40) has a mushroom-shaped boss (118) with a head (120) of a first outer diameter and facing said cover (30), and a trunk (122) of a second outer diameter and extending axially from said head (120) on the opposite side thereof from said cover (30), said first outer diameter being greater than said second outer diameter, said cover (30) and said mushroom-shaped boss (118) being axially engageable, with said feet (114, 116) sliding axially along said head (120) and with said legs (102, 104) deflecting radially outwardly and then said feet (114, 116) sliding axially past said head (120) and said legs (102, 104) deflecting back radially inwardly with said feet (114, 116) behind said head (120) on the axially opposite side thereof from said cover (30), further preferably, wherein said cover (30) is threadingly mounted to said housing (22) and is rotatable about said axis (24), and said legs (102, 104) loosely radially grip said boss (118) and slide circumferentially along said head (120) during rotation of said cover (30).
3. Filter according to claim 2, wherein said cantilever legs (102, 104) are extending axially into said housing (22) to an inner axial reach beyond said first end (36) of said filter element (34) and gripping said end cap (40).
4. Filter according to any one of the preceding claims wherein said filter element (34) has a hollow interior (54) and, preferably, said end cap (40) spans and closes said hollow interior (54), and/or, optionally, wherein said end cap (40) is permanently mounted to said first end (36) of said filter element (34).
5. Filter according to claims 2 and 4 wherein said end cap (40) has a central concave section (128) extending into said hollow interior (54), and said legs (102, 104) extend into said concave section (128), preferably, wherein said end cap (40) spans and closes said hollow interior (54) and is engaged by said legs (102, 104) in said concave section (128) in detent relation, further preferably, wherein said end cap (40) has a central mushroom-shaped boss (118) extending from said concave section (128) axially toward said cover (30).
6. A method for removing a filter element (34) from a

housing (22) extending axially along an axis (24) between distally opposite first and second ends (26, 28), said filter element (34) extending axially in said housing (22) between distally opposite first and second ends (36, 38) respectively at said first and second ends (26, 28) of said housing (22), said filter element (34) having an end cap (40) at said first end (36) of said filter element (34), said method comprising providing a cover (30), removably mounting said cover (30) to said housing (22) and closing said first end (26) of said housing (22), and releasably engaging and gripping said end cap (40) with said cover including upon removal of said cover (30) from said housing (22).

5

10

15

7. Method according to claim 6 comprising providing said cover (30) with a plurality of cantilever legs (102, 104) extending axially into said housing (22), preferably, loosely radially gripping said end cap (30) with said legs (102, 104) in detent relation such that upon rotation of said cover (30) said legs (102, 104) slide circumferentially along said end cap (40) and axially pull said end cap (40) and said filter element (34) from said housing (22).

20

25

8. Method according to claim 7 comprising deflecting said cantilever legs (102, 104) radially outwardly to release said end cap (40), preferably, comprising providing said legs (102, 104) with a fixed root end (106, 108) at said cover (30) and extending said legs (102, 104) axially into said housing (22) to inner free ends (110, 112) having radially inwardly pointing feet (114, 116), providing said end cap (40) with a mushroom-shaped boss (118) having a head (120) of a first outer diameter and facing said cover (30), and having a trunk (122) of a second outer diameter and extending axially from said head (120) on the opposite side thereof from said cover (30), said first outer diameter being greater than said second outer diameter, axially engaging said cover (30) and said mushroom-shaped boss (118) by axially sliding said feet (114, 116) along said head (120) and deflecting said legs (102, 104) radially outwardly and then sliding said feet (114, 116) axially past said head (120) and deflecting said legs (102, 104) back radially inwardly with said feet (114, 116) behind said head (120) on the axially opposite side thereof from said cover (30).

30

35

40

45


50

9. Method according to claim 7 or 8 extending said legs (102, 104) axially into said housing (22) to an inner axial reach beyond said first end (36) of said filter element (34) and gripping said end cap (40).

55

10. Method according to any one of the claims 6 to 9 wherein said filter element (34) has a hollow interior (54), preferably, spanning and closing said hollow

interior (54) with said end cap (40) permanently mounted to said first end (36) of said filter element (34), and/or, optionally, forming said end cap (40) with a central concave section (128) extending into said hollow interior (54), and extending said legs (102, 104) into said concave section (128), preferably, comprising spanning and closing said hollow interior (54) with said end cap (40) and engaging said legs (102, 104) and said end cap (40) in said central concave section (128) in detent relation.

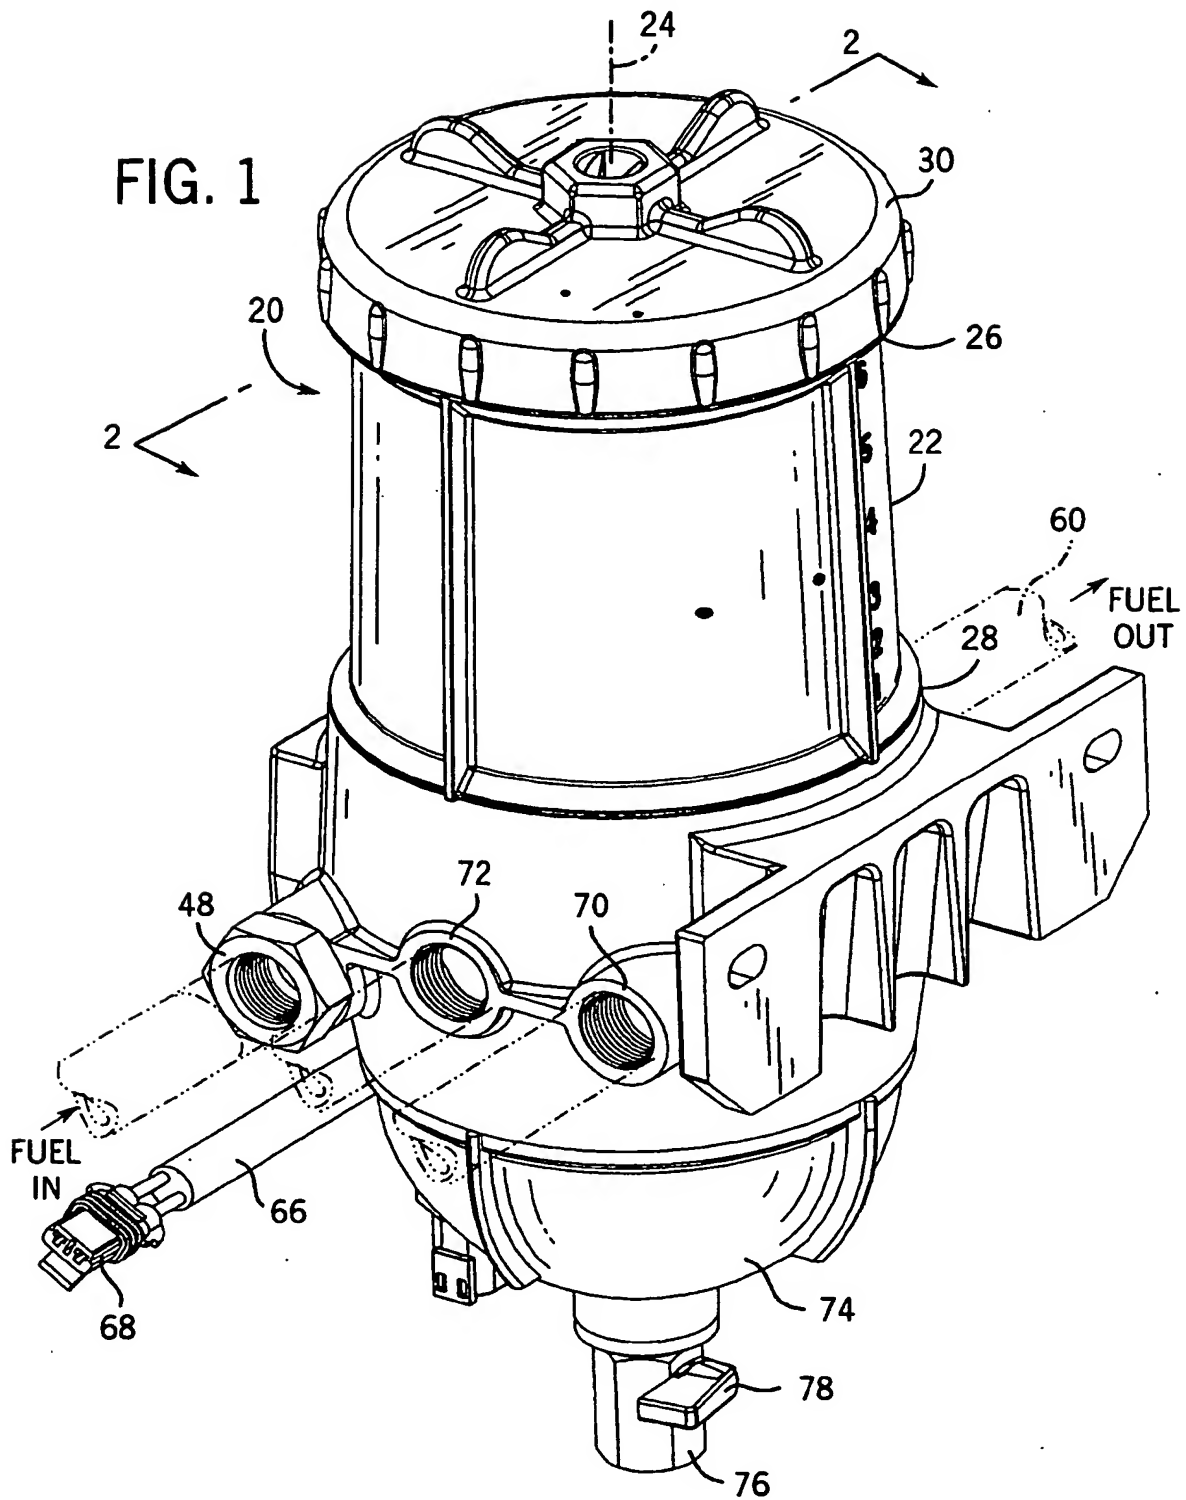

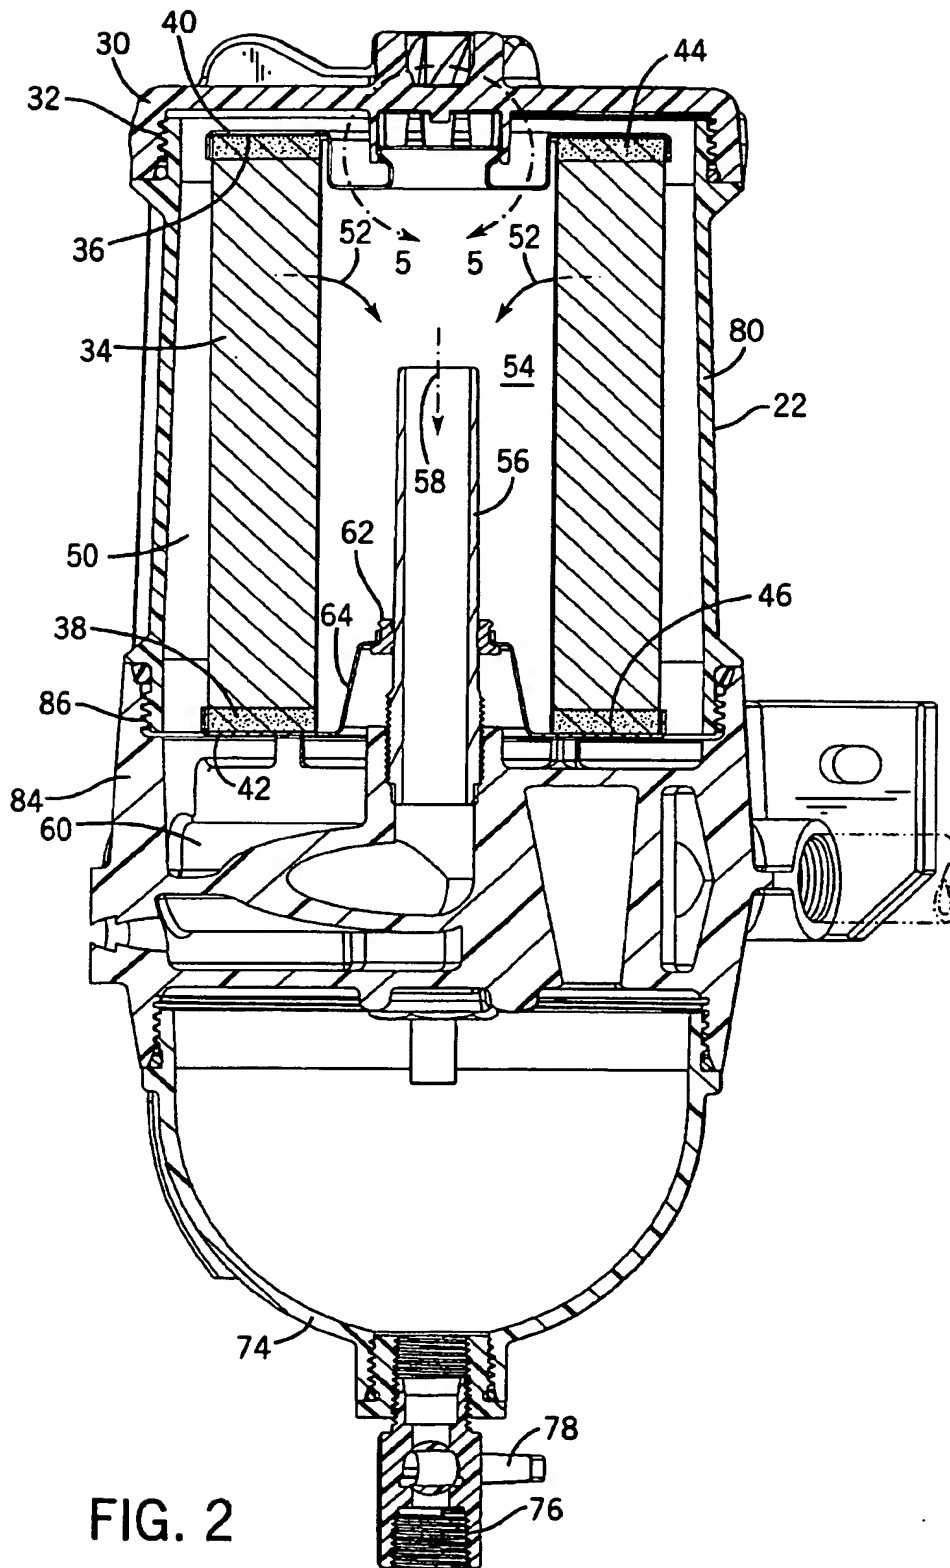


FIG. 3

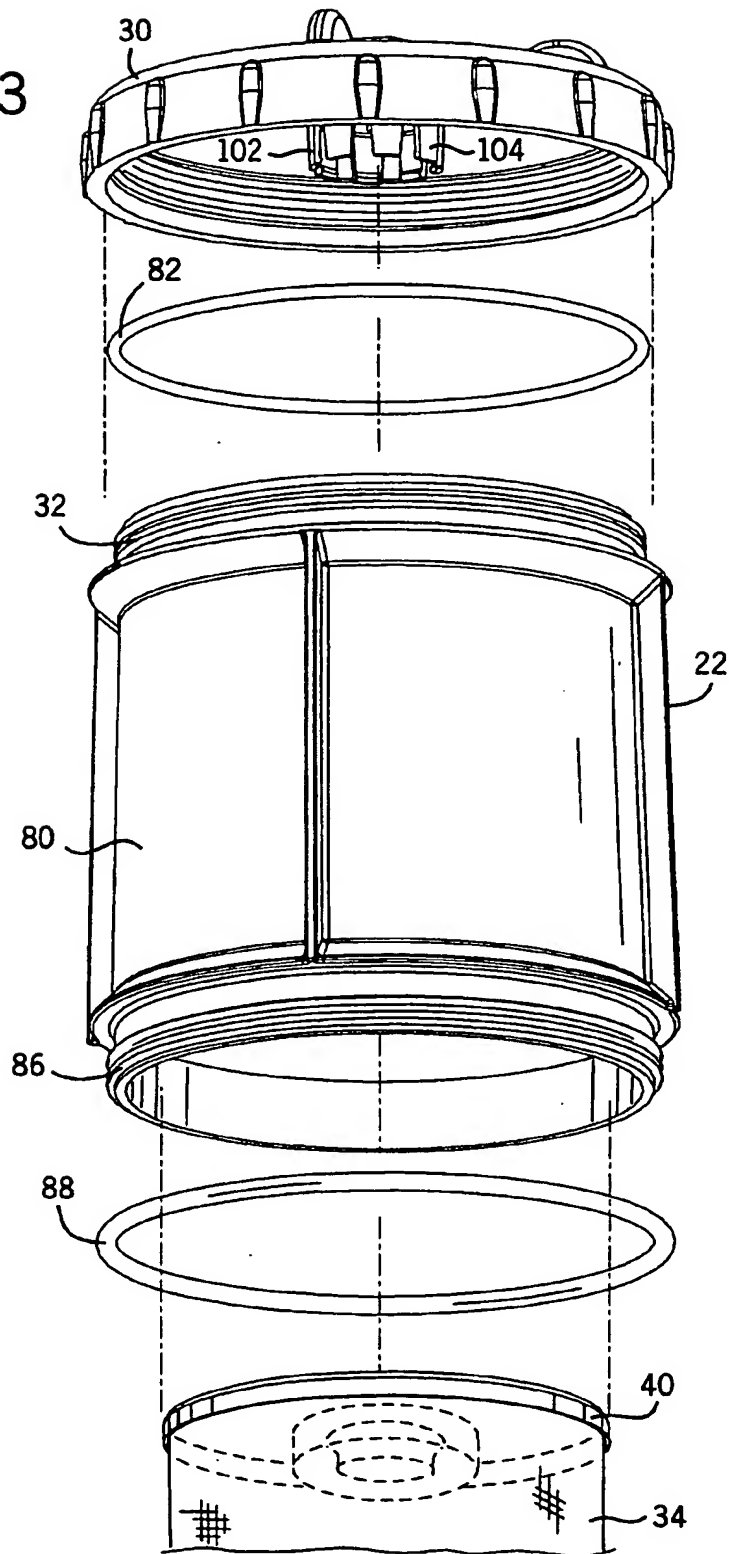


FIG. 4

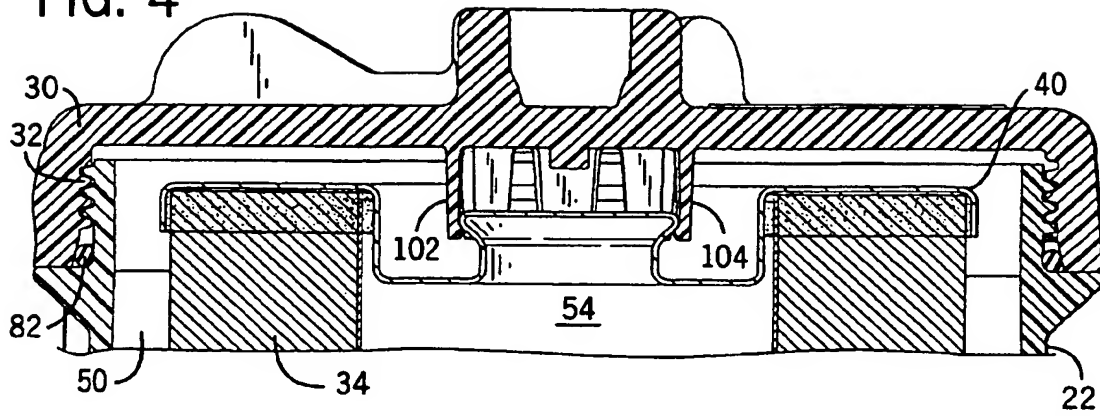


FIG. 5

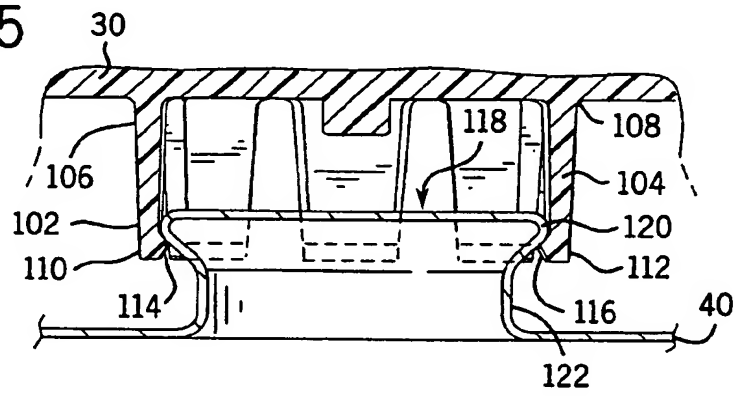
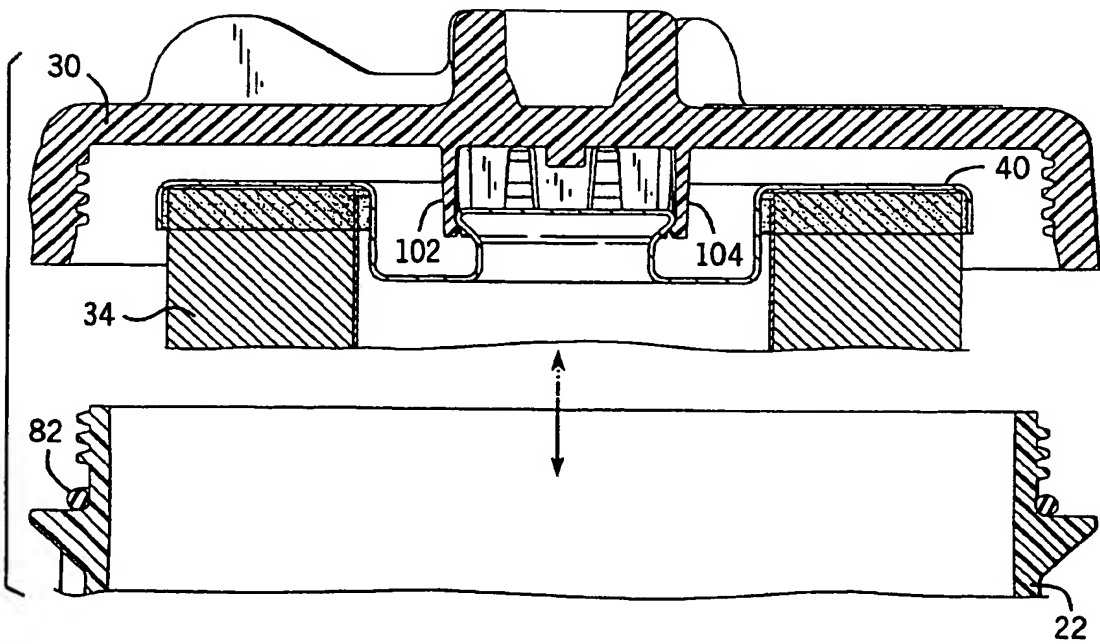


FIG. 9



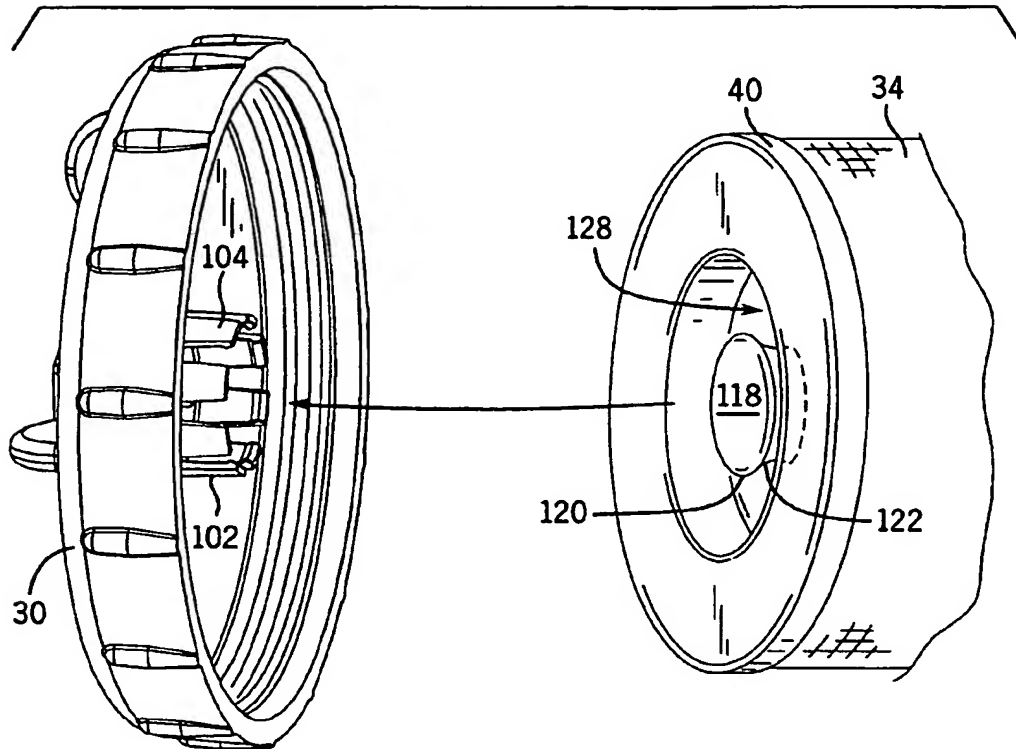


FIG. 6

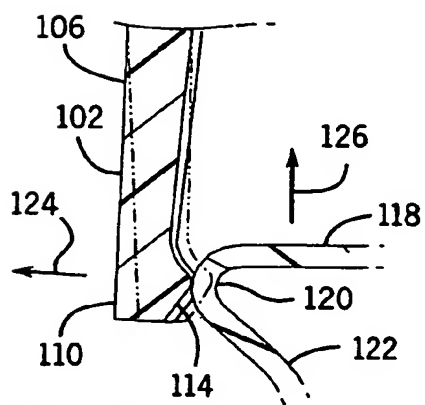


FIG. 8

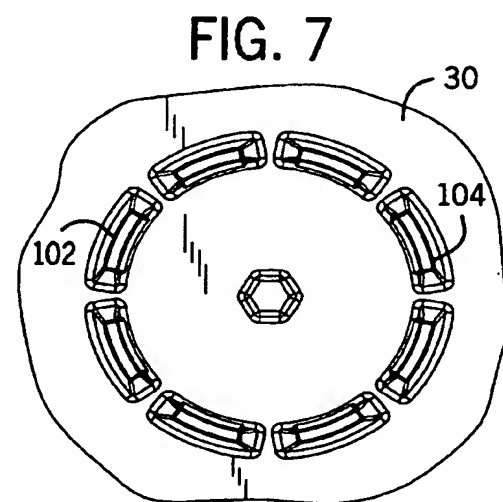


FIG. 7

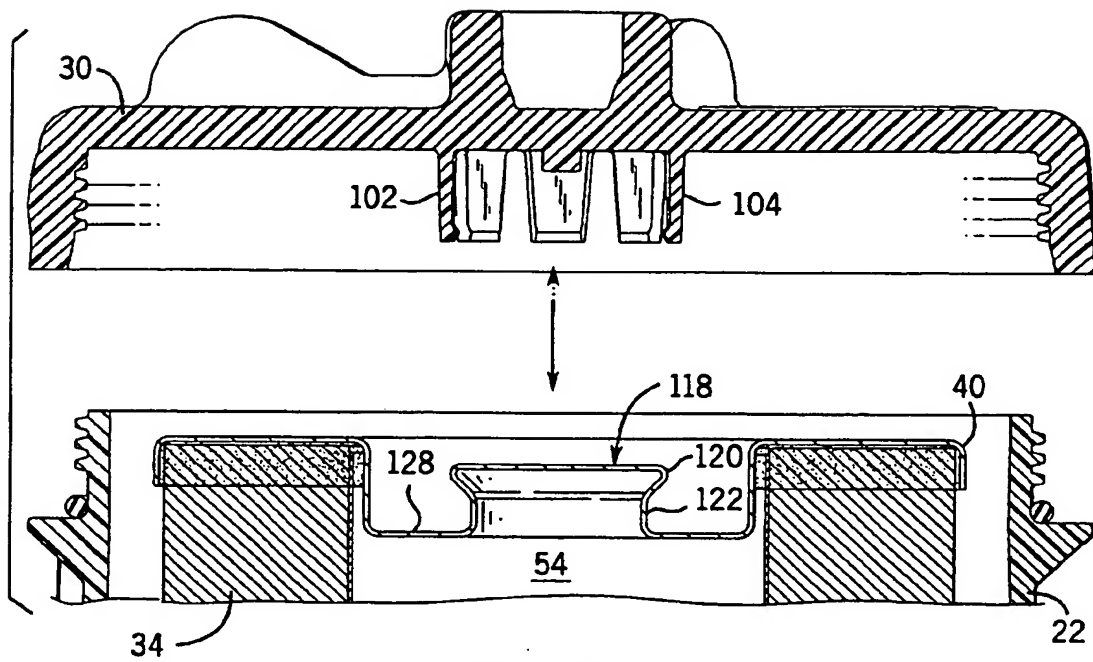


FIG. 10

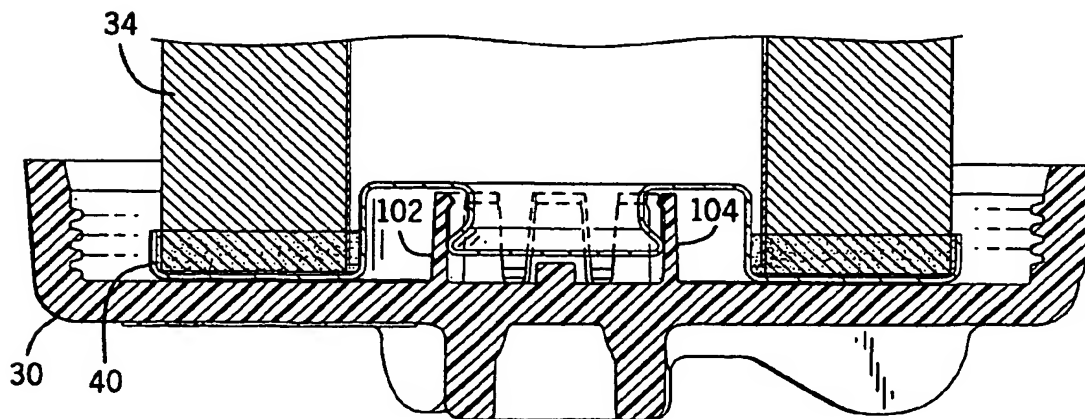


FIG. 11



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 02 01 5148

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	DE 43 44 588 A (KNECHT FILTERWERKE GMBH) 29 June 1995 (1995-06-29) * column 2, line 7 - line 10 * * figure 1 *	1,2,4, 6-8	B01D29/96
X	US 4 906 365 A (PRINZ NORBERT ET AL) 6 March 1990 (1990-03-06) * abstract * * column 2, line 22 - line 38 * * column 3, line 59 - column 4, line 13 * * figure 1 *	1-7,9,10	
X	GB 2 307 422 A (KNECHT FILTERWERKE GMBH) 28 May 1997 (1997-05-28) * the whole document *	1,2,4, 6-8	
X	EP 1 008 375 A (BALDWIN FILTERS INC) 14 June 2000 (2000-06-14) * figures *	1,6	
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
			B01D
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 28 October 2002	Examiner Hilt, D
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>			

LPO FORM 1503 (3.92) (P4001)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 02 01 5148

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

28-10-2002

Patent document cited in search report			Publication date	Patent family member(s)	Publication date
DE 4344588	A	29-06-1995	DE	4344588 A1	29-06-1995
US 4906365	A	06-03-1990	DE	8714656 U1	17-12-1987
			CA	1321149 A1	10-08-1993
			DE	3870808 D1	11-06-1992
			DE	3880979 D1	17-06-1993
			EP	0314915 A2	10-05-1989
			EP	0319518 A2	07-06-1989
			ES	2031203 T3	01-12-1992
			JP	1885091 C	10-11-1994
			JP	2002805 A	08-01-1990
			JP	6011369 B	16-02-1994
			JP	1950755 C	10-07-1995
			JP	2002806 A	08-01-1990
			JP	6079643 B	12-10-1994
			US	4948503 A	14-08-1990
GB 2307422	A	28-05-1997	DE	19642641 A1	28-05-1997
			FR	2741548 A1	30-05-1997
EP 1008375	A	14-06-2000	AU	6318399 A	15-06-2000
			EP	1008375 A1	14-06-2000
			JP	2000176217 A	27-06-2000

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☒ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.